




# Nokia 6030 Microphone Replacement

Written By: Spencer Woodworth

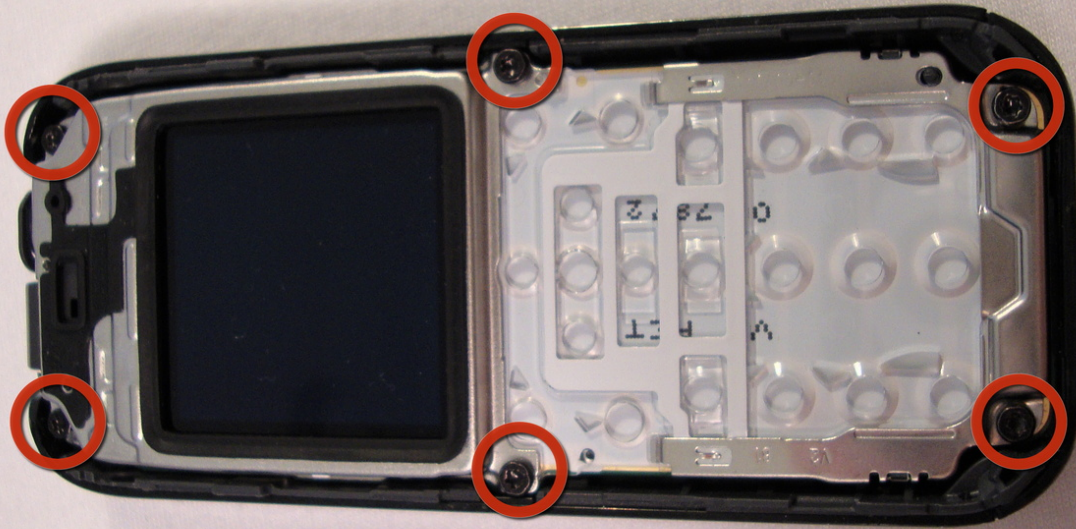

## INTRODUCTION

Replacing the phones microphone

---

### TOOLS:

- [Tweezers](#) (1)
  - [T6 Torx Screwdriver](#) (1)
-

## Step 1 — Battery



- Press the grip on the back of the phone and slide the rear housing down towards the bottom of the phone.

## Step 2



- Use your fingernail and gently pull the the bottom of the battery up.
- Lift out battery and remove.



## Step 3 — SIM Card




- Use your fingernail to lift the metal cage up.
- Remove SIM card.

## Step 4



- Close the metal cage.

## Step 5 — Front Cover

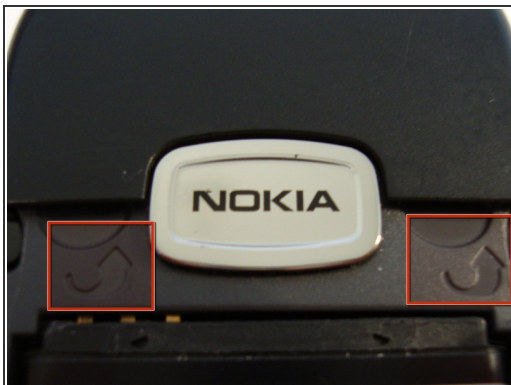

- Pull the top casing up after inserting thumbs under the two tabs labeled with the arrows. then slowly rotate up and over the screen.


## Step 6



- After removing the top cover, turn the phone over so the screen is facing upwards.



## Step 7

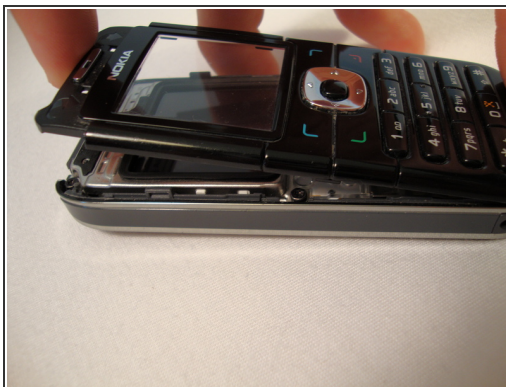

- Lift the front off the phone by pulling above the arrows.

## Step 8 — Microphone



- Remove the six screws with a T-6 Torx screwdriver.

## Step 9



- Lift the logic board and screen from the top.

⚠ Be careful of loose parts.

## Step 10



- Use tweezers to aid in the removal of the microphone.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-10-15 01:58:33 AM.